HITACHI
Inspire the Next

CP-X995 series

- 4,500 ANSI Lumens
- Native XGA Resolution
- 14.3 lbs.
- 16:9 Mode
- Contrast Ratio 300:1
- 2 RGB Inputs/RGB Output
- Composite/Component/ S-Video/DVI Input
- Motion Adaptive Progressive Scan
- 36dB (Whisper mode)
- Switchable IR Receiver
- Noise Reduction System
- Black Enhancement System
- Picture-in-Picture
- FCC Class B
- Digital zoom (x 4)
- Picture freeze function
- Cinema Mode (3/2 Pull-Down System)
- Vertical & Horizontal Keystone Correction
- My Screen (user programmable start-up screen and blank screen)
- HDTV Theater Ready

SPECIFICATIONS

Model name		CP-X995 series
Liquid crystal panel structure		1.3" polysilicon active-matrix TFT x 3
Number of pixels		786, 432 pixels (H 1,024 x V 768)
Resolution	Video	540 TV lines
	RGB	1024 dots x 768 lines
Colors		16.7 million colors
Aspect ratio		Native 4:3 (16:9 resizing mode)
Lens		Power zoom (f=1.7 - 2.3) 1:1.3, Power focus
Throw ratio (distance:width)		1.82 ~ 2.38 : 1
Lamp		275W UHB
Brightness		4,500 ANSI lumens (Approx 3,600 lumens in whisper mode)
Expected lamp life		Approx. 2,000 hours
Contrast ratio		300 : 1
Speakers		1.2W + 1.2W (Stereo)
Power supply		AC100-120V/AC220-240V
Power consumption		440W
Operating temperature		32°F ~ 95°F (0° ~ 35°C)
Input signals	RGB	VGA, SVGA, XGA, SXGA (COMPRESSED), MAC13", MAC16"
	Composite video	NTSC, NTSC4.43, PAL, PAL60, PAL-N, PAL-M, SECAM
	Component video	480i, 575i, 480p, 1,080i, 720p
Acoustic noise level		40dB (36dB in whisper mode)
H sync		15kHz ~ 80kHz
V sync		50Hz ~ 120Hz
Vertical keystone correction		Digital keystone +/– 15°
Horizontal keystone correction		Digital keystone +/– 5°
Approvals		UL, C-UL, FCC Class B, CE, TUV
Input/Output terminals — RGB input	Digital RGB	DVI-D connector x 1
	Analog RGB	15-pin D-sub connector x 2
	Audio	Stereo mini jack x 2
RGB output	RGB	15-pin D-sub connector x 1
	Audio	Stereo mini jack x 1
Video input	S-video	Mini-DIN 4 pin connector x 1
	Composite video	RCA jack x 1
	Component video	RCA jack x 3
	Audio	RCA jack x 2 (L/R)
Control terminals		15-pin D-sub connector x 1 USB connector (USB mouse) x 1
Compatible controls		PS/2, ADB, Serial, RS-232C (serial)
Chassis — Dimensions		11.4" x 5.5" x 13.6" (W x H x D)
Weight		14.3 lbs.
Supplied accessories		Remote control with laser pointer, Power cord, RGB cable, RCA component cable, batteries (AA), PS/2 mouse cable, operator/safety manual
Separate option accessories — Lamp		CPX990LAMP (Part #: DT00491)
Remote control		(Part #: HL01811)
Wide angle lens		(Part #: WL-201)

HITACHI
Inspire the Next

CP-X995 series

Screen Size 4.3		Throw distance	
Diagonal*	Width*	Min*	Max*
40	32	55	73
60	48	85	114
80	64	114	151
100	80	144	191
120	96	176	231
150	120	220	282
200	160	291	386

Throw ratio: 1.82 ~ 2.38 : 1 (distance:width)

*: Measured in inches

CP-X990/CP-X995 Dimensions
(incl.protruding part)

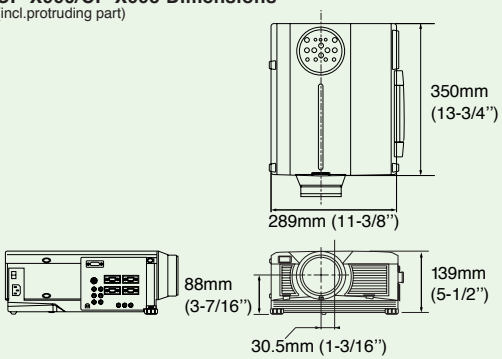

For sales information, call 1.800.225.1741.
Printed 04/04
Specifications are subject to change without notification.